



## Accessories Automotive



Power and More

# Transport System

## ✓ Transport System

For one battery charger (standard version)

Type: MPC4 (f.e. DBL1600)

Dimensions transport system (HxWxD): 100(202)x51x62 cm



Art.-No. 140526

Art.-No. 140526/01

Art.-No. 140526/21

Transport system options

incl. signal lamp (height 100 cm)

incl. signal lamp (height 20 cm)

## ✓ Transport System for B-Housing Version



Art.-No. 140527

Type 1 for one charger

## ✓ Transport System multifunctional



Art.-No. 140534/1

Transport System with the possibility of mounting devices in B housing incl. the possibility of mounting an external signal lamp

Art.-No. 140534/2

Transport System with the possibility of mounting DBL2250/3W, DBL5250/3W incl. the possibility of mounting an external signal lamp

Art.-No. 140534/3

Transport System with the possibility of mounting accu buffer D-IBM2900, the possibility of mounting DBL3W or B and the possibility of mounting an external signal lamp

## Mounting

### ✓ Wallmount

For one charger (standard version)

Type: MPC4 (f.e. DBL1600)



Art.-No. 140551

### ✓ Wallmount with cable holder

Wallmount with cable bracket incl. mounting and fastening materials for DBL series in B-Housing Version




Art.-No. 140418

## ✓ Basic Carrier / Rework Station

Basic Carrier for DBL MPC4 chargers,  
B-Housing Version

incl. EU socket combination – not mounted  
other socket combination on request

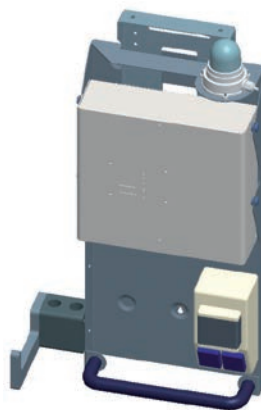

Art.-No. 140422

Art.-No. 140422/10

## Balancer

### ✓ Cable spring balancer with locking device

Load 1,5...3 kg

including conductor holder for round cables




Art.-No. 140061

Art.-No. 140061/1

## Software

### ✓ Deutronic® ServiceTool / OCT


Software for a quick and easy update of customer specific firmware (inclusive parameter) via RS232 or USB. Link available via e-mail.

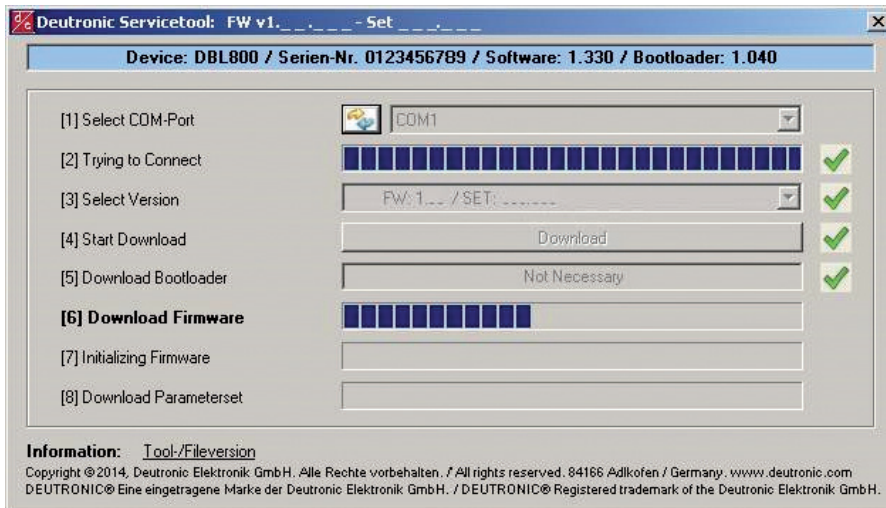


Art.-No. on request

### ✓ D-TOOL ParameterEdit MPC4

For PC based parameterization of the DBL MPC4 battery chargers and configuration of the D-ADAPT-MPC4 Network Adapter Series via RS232/USB or Ethernet/WLAN

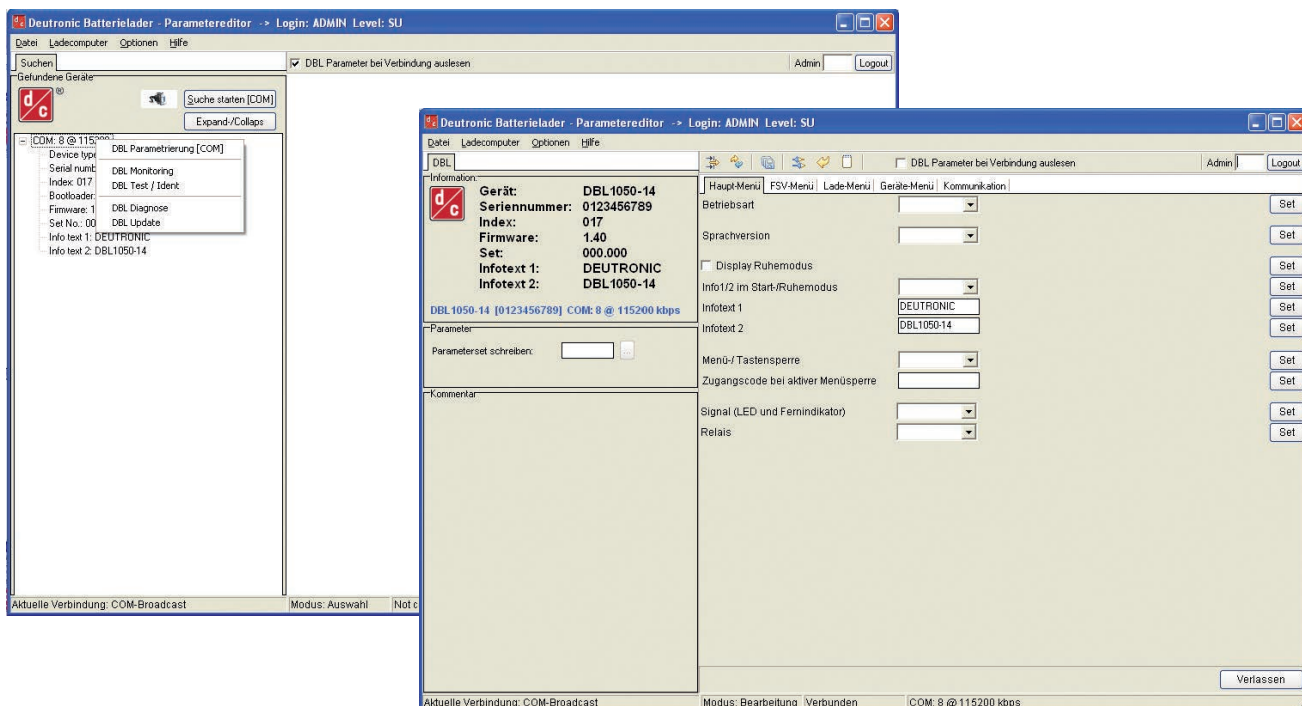

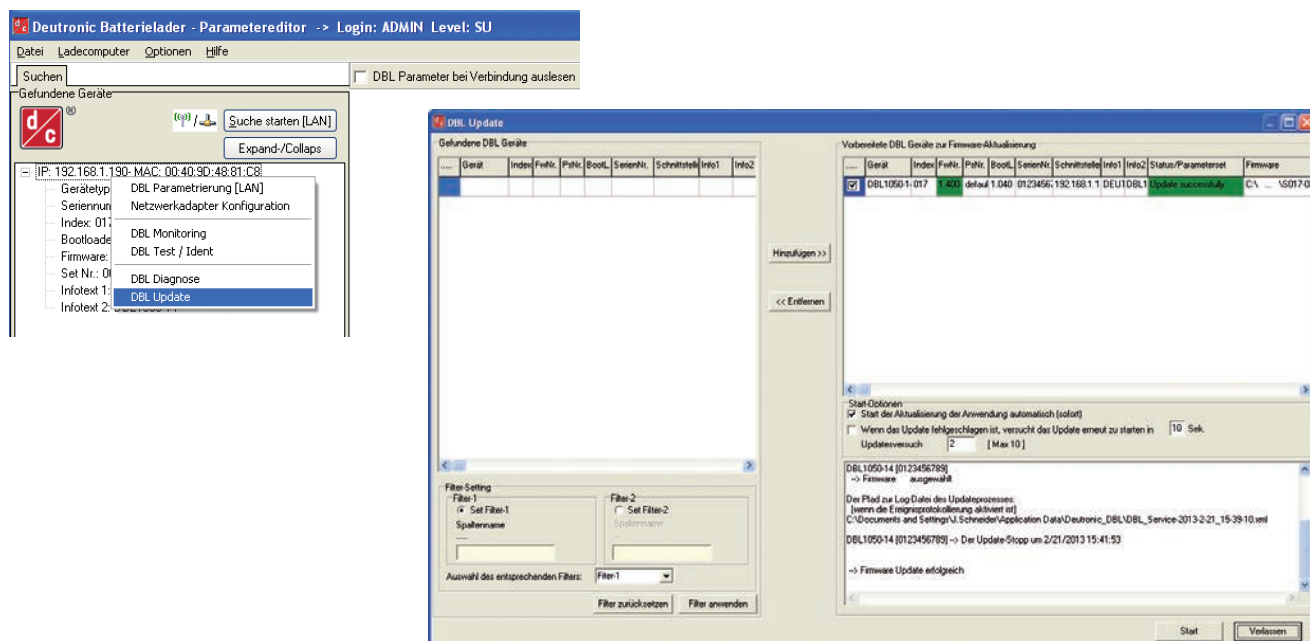

For DBL battery chargers with MPC4 controller board and D-ADAPT-MPC4 Network Adapter Series\*

Single-seat license (Microsoft® Windows® Operating Systems: Windows® XP, Windows® Vista or Windows® 10)

Without data cable

Art.-No. 140787

\* D-ADAPT-MPC4 ETHERNET – run-out (see page 8)

Art.-No. 140344

## Signals + Communication

### ✓ External Signal Lamp

For clear signaling of the charging status on production lines and workshops

Signal Lamp for charging computers

Type: MPC4 (f.e. DBL1600)



#### ✓ with 2.5 m cable length (without acoustic signaling)

Acoustic signaling with signal "green"

Acoustic signaling with signal "yellow"

Acoustic signaling with signal "red"

Art.-No. 107492

Art.-No. 107492/20\*

Art.-No. 107492/21\*

Art.-No. 107492/22

#### ✓ with 0.5 m cable length (without acoustic signaling)

Acoustic signaling with signal "green"

Acoustic signaling with signal "yellow"

Acoustic signaling with signal "red"

Art.-No. 107492/1

Art.-No. 107492/10\*

Art.-No. 107492/11\*

Art.-No. 107492/12



(\* minimum order quantity:  
5 pieces)




## ✓ D-ADAPT-SBB2X25 T-Adapter

The T-Adapter enables the utilisation of the further functions of the 25 pole DBL interface while at the same time the external signal lamp (DBL-SIG-LR) is connected to the DBL.

Type: MPC4 (f.e. DBL1600)

Art.-No. 140334



## ✓ D-ADAPT-SB25 Data Cable

Data cable male-female, 25 pole / 1.8 m

Art.-No. 140337

## ✓ DBL MPC4 Network Adapter for ETHERNET

Note: The industrial network adapter is plugged directly to the DBL interface and requires no additional power supply.

Type: MPC4 (f.e. DBL1600)

### ✓ D-ADAPT-MPC4 ETHERNET – run-out



D-ADAPT-MPC4 ETHERNET enables the DBL battery charger series with MPC4 controller board to be connected to a 10/100Mbit Ethernet network (TCP/IP or UDP).

Art.-No. 140344



Battery charger not included in delivery

### ✓ D-ADAPT-MPC4 ETHERNET

To connect charging computers of the DBL Series with MPC4 controller board to an Ethernet network

Art.-No. 140344/1



## Connection Technology

### ✓ Mains Cables

Mains cable Europe  
Schuko according to IEC-60320 C13



3,0 m

Art.-No. 140502

5,0 m

Art.-No. 140501

Mains cable for USA  
according to NEMA 5-15



3,0 m

Art.-No. 140519

5,0 m

Art.-No. 140504

Mains cable for Australia  
according to AS3112



2,5 m

Art.-No. 140515

5,0 m

Art.-No. 140416

Mains cable for UK  
according to BS1363



2,5 m

Art.-No. 140517

5,0 m

Art.-No. 140413

Mains cables international (4 SET)

5,0 m

Art.-No. 140415

Set consists of 4 mains cables

Europe-Schuko • USA / Canada / Japan

UK / Ireland / Hong Kong • Australia / New Zealand

Mains cables international (3 SET)

5,0 m

Art.-No. 140420

Set consists of 3 mains cables

USA / Canada / Japan • UK / Ireland / Hong Kong

Australia / New Zealand

## ☑ Charging Cables

16 mm<sup>2</sup> / 100 m reel      Cable for battery charger 16 mm<sup>2</sup>

Art.-No. 140509

### ☑ Standard

Cable / Length	Connection	Cable Clamps	Art.-No.
16 mm <sup>2</sup> / 3,0 m	Welding connectors	Standard 200A	140707
16 mm <sup>2</sup> / 5,0 m	Welding connectors	Standard 200A	140708
25 mm <sup>2</sup> / 5,0 m	Welding connectors	Standard 200A	140710

### ☑ Special Variants

Cable / Length	Connection	Cable Clamps	Art.-No.
10 mm <sup>2</sup> / 2,0 m	Welding connectors	Standard 80A	140684
16 mm <sup>2</sup> / 7,0 m	Welding connectors	Standard 200A	140712
16 mm <sup>2</sup> / 10,0 m	Welding connectors	Standard 200A	140721
16 mm <sup>2</sup> / 12,0 m	Welding connectors	Standard 200A	140709
16 mm <sup>2</sup> / 15,0 m	Welding connectors	Standard 200A	140708/9
16 mm <sup>2</sup> / 3,0 m	Welding connectors	angled 200A	140686
16 mm <sup>2</sup> / 5,0 m	Welding connectors	angled 200A	140687
25 mm <sup>2</sup> / 5,0 m	Welding connectors	Pressed cable lug M8	140677
16 mm <sup>2</sup> / 3,0 m	Cable lug M10	Standard 200A	140719

## ✓ Cable clamps 200A, completely isolated

For professional applications

Standard red

black



Art.-No. 140557

Art.-No. 140558

Set angled red and black



Art.-No. 140549

## ✓ Charging cable coupling

Charging cable coupling (plug)

Charging cable coupling (socket)



Art.-No. 140556

Art.-No. 140555

## ✓ Welding connector

Socket / plug for mounting in your own application

Mounting plug (minus)

Mounting socket (plus)



Art.-No. 140563

Art.-No. 140562

## ✓ Welding plug / Charging cable coupling set

Set includes Art.-No. 140555, 140556, 140562 and 140563



Art.-No. 140508

## ✓ Mains connection kit


For DBL3000/3W and DBL5500/3W



Art.-No. 140742

## ✓ HARTING-plug

HARTING-plug for all DBLxxx/3W  
HAN-versions (mains connection)

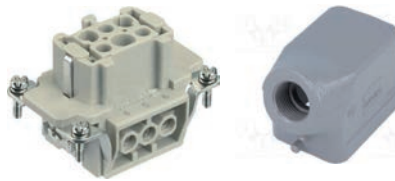

Art.-No. 140442

## Miscellaneous

### ✓ Spare Parts

Rubber foot for DBL800

Art.-No. 140726

Hinged feet frontside for Type: MPC4 (f.e. DBL1600)

Art.-No. 140731

Carrying handle for product groups:

Type: MPC4 (f.e. DBL1600)

(Attention – handle is not generally mountable! The basic article needs to be prepared ex factory.)

Art.-No. 140728



**Further spare parts on request**

## Info / Contact / Imprint

### ☑ Info

Deutronic supplies the industry with innovative and technologically leading solutions worldwide.

As an expert for power electronics, Deutronic develops innovative solutions, systems and services with high added value in the following fields:

Automotive, Transportation & Logistics, Test Systems

### ☑ Contact

#### **Deutronic Elektronik GmbH**

Deutronicstraße 5

D-84166 Adlkofen/Germany

Tel.: +49 (0)8707 920-0

Fax: +49 (0)8707 1004

E-Mail: [sales@deutronic.com](mailto:sales@deutronic.com)

[www.deutronic.com](http://www.deutronic.com)

### ☑ Imprint

#### **Deutronic Elektronik GmbH**

Represented by: Dipl.-Ing. Eduard Wanzke,  
Christian Wanzke, Thomas Wanzke

USt-IdNo.: DE 128 947 951

WEEE-Reg.-Nr. DE 13739201

Commercial Register: HRB Nr. 18 37

Court of jurisdiction: Landshut/Germany

All technical data measured with nominal input voltage, full load and 25°C ambient temperature, when not otherwise stated.

Technical changes and errors excepted. The details in the catalogue and in the data sheets describe products, their characteristics are not guaranteed. Loading with "threshold" values (simple combinations) are permissible without permanent damage to the equipment. Operation of the equipment with threshold values for long periods of time can impair the reliability. The threshold value tolerances are subject to usual fluctuations.



[www.deutronic.com](http://www.deutronic.com)